



CN1 PIN ASSIGNMENT

No.	SYMBOL	No.	SYMBOL	No.	SYMBOL
1	CS1	11	D5	21	CAP2+
2	RES	12	D6	22	V1
3	A0	13	D7	23	V2
4	WR	14	VDD	24	V3
5	RD	15	GND	25	V4
6	D0	16	VOUT	26	V5
7	D1	17	CAP3-	27	VR
8	D2	18	CAP1+	28	C86
9	D3	19	CAP1-	29	P/S
10	D4	20	CAP2-	30	IRS

DOTS DETAIL (20:1)

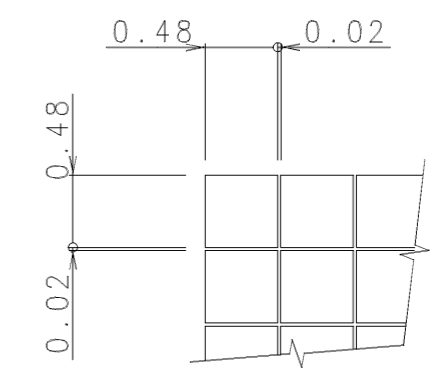

CIRCUIT DIAGRAM

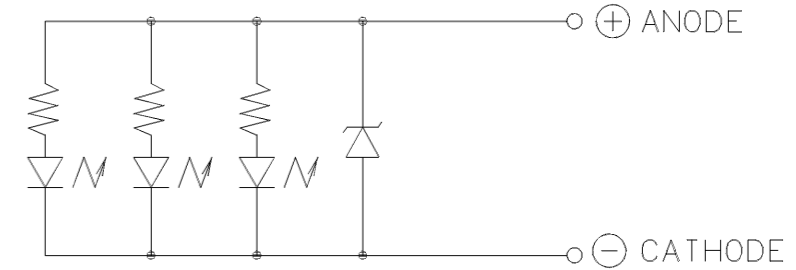

注記 NOTES
 1. 表示傾き: |a-b| ≤ 0.5 (DISPLAY SKEW)
 2. ● 印の付いた寸法, 仕様は管理特性の指示を示す.
 THE DIMENSIONS WITH THE MARK (●) ARE CONTROLLED AS A PARTICULAR CHARACTERISTIC.

TOLERANCE			THIRD ANGLE PROJECTION	DATE MAR. 28 '02	OPTREX CORPORATION
MEASURE	A	B			
L ≤ 16	±0.1	±0.3	±1	UNIT mm	APPROVED T. Okamoto
16 < L ≤ 63	±0.2	±0.5	±1.5	SCALE 1:1	CHECKED M. Kinoshita
63 < L ≤ 250	±0.3	±0.8	±2		
250 < L ≤ 500	±0.5	±1.2	±3	DRAWN K. MURAKAMI	DWG NO UE-311234 A
500 < L	±0.8	±2	±4		
ANGLE	±1°	±5°	±10°	TITLE DIMENSIONAL OUTLINE	
				CODE F-51553GNBJ-LW-AB	